

TRAC REGULATOR CO., INC.

STYLE 'HG'

GAS PRESSURE REDUCING VALVE

MIL-V-2961D TYPE I CLASS 1 BODY A
SERIES 400 and 600

SUITABLE FOR SHIPBOARD SERVICE



**TRAC Regulator Company Inc.
160 South Terrace Avenue
Mount Vernon, New York USA 10550-2408**

**Phone: (914) 699-9352
Fax: (914) 699-9367**

GENERAL INFORMATION

INTRODUCTION

The TRAC Style 'HG' pressure reducing valve is a self-contained, spring loaded, direct operated device for regulating and reducing high pressure gasses, primarily air or nitrogen, to any desired operating pressure within its adjustable range. The design, construction, and materials utilized for the TRAC Style 'HG' pressure reducing valve are ideally suited for shipboard air or nitrogen system services, but are not intended for oxygen or oxygen clean system applications.

PRINCIPLES OF OPERATION

Fluid enters the pressure reducing valve assembly (Figure 1) in the direction of the arrow cast in the body and passes downward through the seat to the outlet side of the valve. The outlet pressure is exerted on the underside of the diaphragm, indicated in the figure as the diaphragm chamber. The downstream pressure is obtained through an internal sensing line connected to outlet side port of the body. The spring is adjusted by turning the adjusting screw to balance the outlet pressure at any desired point within the range stamped on the nameplate. The pressure reducing valves will open or shut whenever this balance is changed due to any change in downstream pressure. The purpose of the O-ring on the valve stem is to form a piston seal to balance the pressure reducing valve. The seal ensures that variations in the inlet pressure will not affect the downstream-regulated pressure.

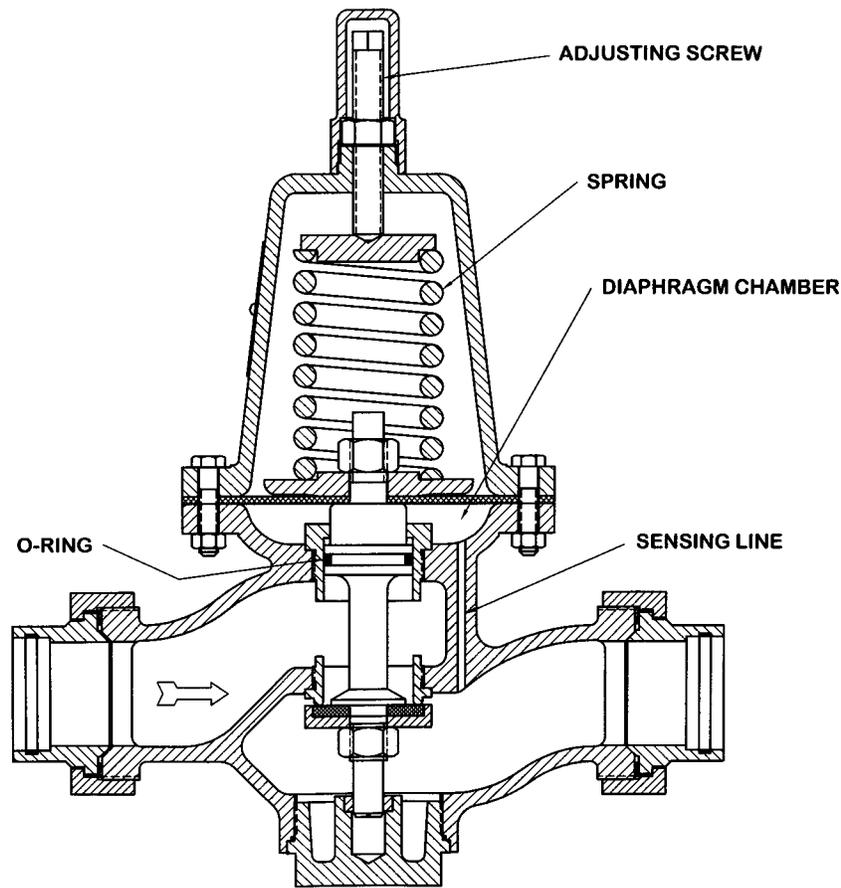


Figure 1 VALVE ASSEMBLY

OPERATING INSTRUCTIONS

PRESSURE ADJUSTMENT

The TRAC Style 'HG' pressure reducing valve can be set to control at any pressure within the limits of the pressure stamped on the nameplate. The valve will maintain the outlet set pressure, within specification requirements, regardless of changes in inlet pressure.

CHANGING PRESSURE SETTING

TRAC Style 'HG' pressure reducing valve is provided with spring adjustment. More or less tension of spring will cause the valve to control at a higher or lower pressure. See Figure 2 for pressure adjustment illustration.

To increase pressure, remove Cover (1), loosen Locknut (2) and turn Adjustment Screw (17) clockwise.

To decrease pressure, remove Cover (1), loosen Locknut (2) and turn Adjustment Screw (17) counter-clockwise.

After pressure setting adjustment has been made, always lock Adjustment Screw (17) to prevent rotation with Locknut (2) and replace Cover (1).

IN SERVICE OPERATION

Once the valve has been set to design requirements, operation of the pressure reducing valves is automatic to control a preset downstream pressure. There is no in-service operator action required.

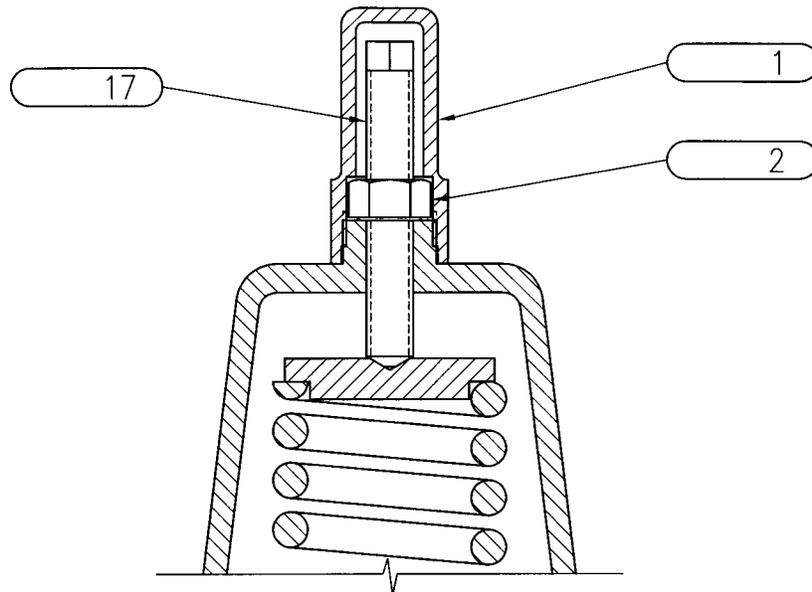


Figure 2 ADJUSTMENT

INSTALLATION

The pressure reducing valve must be clean and free from packing material and other foreign matter before installing into a clean pipeline. Connect the valve into the pipe line so that the flow is in the direction indicated by the arrow cast on the body. The valve will work equally well in any position, but it is preferable to install the valve with the adjusting spring vertically upward. This will minimize wear on all moving parts.

BYPASS INSTALLATION

Although not always required, it is a good engineering practice to install a hand operated bypass around any automatic control valve, permitting uninterrupted service during necessary servicing of automatic devices. A typical installation diagram incorporating a bypass line is provided in Figure 3.

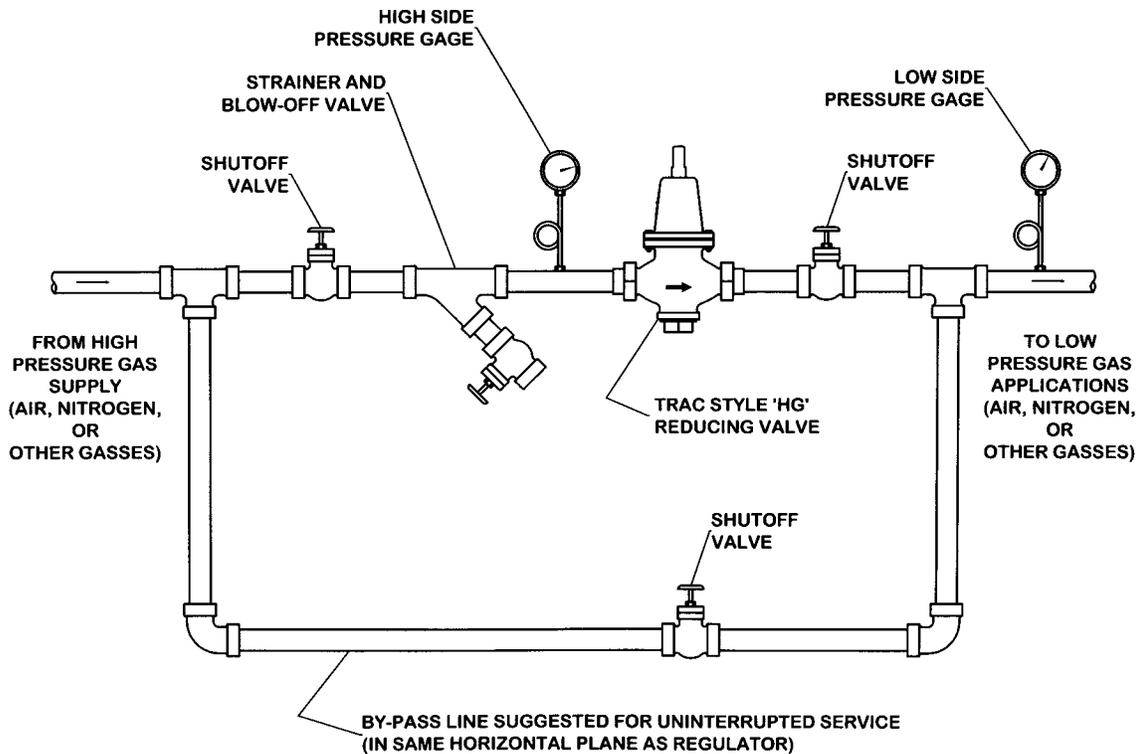


Figure 3 BYPASS INSTALLATION

DETAILED DESCRIPTION

NORMAL POSITION

The TRAC Style 'HG' pressure reducing valve design is "normally open". The valve is shipped in the open position and it will remain open until some other force closes it. With no pressure under the diaphragm, the load applied on the spring by the adjusting screw will force the main disc off the valve seat to the open position.

FAIL POSITION

Should the diaphragm fail in operation, the valve will fail in the open position. With equal pressure under and over the diaphragm, the load applied on the spring by the adjusting screw will force the main disc off the valve seat to the open position. It is strongly advised that a relief valve be installed on the downstream side of the pressure reducing valve to prevent damage to low pressure side equipment and piping.

HOW DOES IT WORK

For the purposes of this example, let us assume that we have installed a pressure reducing valve in a system that will deliver air or nitrogen with an inlet supply pressure of 150 psig and the valve is set to lock-up at 20 psig.

Condition 1- No Flow

As inlet pressure is introduced into the system, the air or nitrogen will flow through the open reducing valve, into the diaphragm chamber, and continue throughout the downstream piping. With no demand downstream, the pressure on the outlet side of the reducing valve begins to build. Pressure on the outlet side of the reducing valve is transmitted through the sensing line and under the diaphragm. The pressure in the diaphragm chamber opposes the downward force of the spring and the valve begins to close. When the pressure on the outlet side reaches 20 psig the pressure reducing valve closes tightly.

This condition is described as the "lock-up" or "no-flow" condition.

Condition 2- Flowing

By gradually increasing demand downstream of the pressure reducing valve and observing the low pressure side gauge, it will be immediately noted that as flow through the valve increases- the outlet pressure decreases. As the downstream demand increases, the pressure under the diaphragm decreases, which in turn allows the spring to force the seat opening wider in an effort to satisfy the flow demand. This process could continue until the pressure reducing valve reached its maximum capacity and conceivably, the outlet pressure dropped to zero.

In practice, a valve is sized so that the rated capacity of the valve would supply enough flow under minimum inlet pressure conditions to prevent an unacceptable variation in outlet pressure from lock-up to rated flow.

The variation in outlet pressure from lock-up to rated flow is typically described as the "droop" pressure or "set pressure deviation".

ORDERING INFORMATION

MANDATORY INFORMATION

It should be readily understood, that where flow requirements and regulator performance are critical, the selection of a pressure reducing valve should not be based on the size of existing inlet piping. In order to correctly size a pressure reducing valve for a particular application, the user must have a complete understanding of the conditions at the valve. As a minimum, the user should know the following conditions:

OUTLET SET PRESSURE (AT LOCKUP) This is the maximum pressure that downstream equipment and piping will be subjected to during normal operation. This value is used to choose the adjustable outlet pressure range of the valve.

STANDARD RANGES	
1/4" TO 3/4"	1" TO 2"
5-60 PSI	5-30 PSI
	25-60 PSI
50-150 PSI	50-125 PSI
	100-200 PSI

MAXIMUM INLET PRESSURE This is the maximum pressure that the pressure reducing valve will be subjected to under any operating conditions. This value is used to choose the appropriate pressure rating of the valve and to establish the end connection rating.

600# Socket Weld Union End connection shall be in accordance with NAVSEA 803-1385946, but the socket bore shall not be grooved for brazing ring. The end to end dimensions of the valve are identical to the 600# (military) silbraz union end valve.

PRESSURE RATING/ END CONNECTIONS	
RATED PRESSURE (PSIG)	UNION END
400 (Military)	MIL-F-1183
600 (Military)	NAVSEA 803-1385946
600 (Socket Weld U/E)	NAVSEA 803-1385946

Note: For certain shipboard applications, the use of silver brazed tailpieces is prohibited for selected pressures and gases. See MIL-STD-438 and MIL-STD-777 for specifics.

MINIMUM INLET PRESSURE It is of primary importance to know the minimum inlet pressure at the valve. Often the minimum inlet pressure is estimated from a pump performance chart or given as a reading from a remote location, ignoring all frictional losses of upstream piping and fittings. This value is used in the calculating the appropriate size of the pressure reducing valve.

REQUIRED CAPACITY (AT MINIMUM INLET PRESSURE) In most cases inlet pressure varies widely from maximum to minimum inlet pressure values. To correctly size a pressure reducing valve for a particular application, the required flow at minimum inlet pressure must be known.

OTHER CONSIDERATIONS

For air or nitrogen service applications having an inlet pressure rating less than 400 PSIG, consider the Trac Style 'HA' air or nitrogen pressure reducing valve. This valve is manufactured in accordance with MIL-V-24384B Type I, Class A, Design B and is suitable for shipboard

systems. The Trac Style 'HA' air or nitrogen pressure reducing valve is available with a 150 PSIG pressure rating.

ORDERING INFORMATION


REFERENCE DATA

For specific information regarding a particular valve, consult the nameplate (Figure 4) affixed to the spring chamber of each production valve. For operating characteristics of a valve installed in a particular shipboard system consult the applicable certification data sheet or ship's drawing index. When contacting Trac Regulator Co.,Inc. regarding troubleshooting, repair, or replacement, please have the following nameplate information available: Valve ID Number and Serial Number.


MIL-SPEC. MIL-V-2961		
TYPE I	CLASS 1	DESIGN A
NSN		
CID		
SERVICE		
INLET PSIG		
OUTLET PSIG		
RATED PSIG		
CAP.		SIZE
VALVE ID NO.		
SERIAL		STYLE
DATE MFG.		
TRAC Regulator Co.,Inc.		
Mount Vernon New York USA		

Figure 4 NAMEPLATE

SPACE ENVELOPE DIMENSIONS

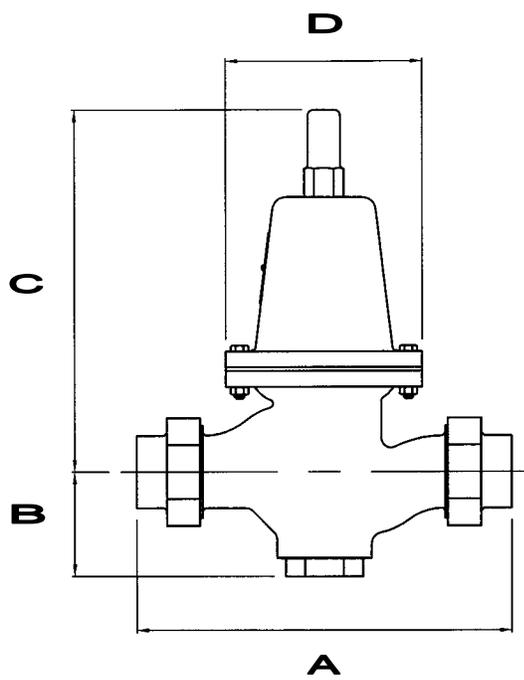


1/2" TO 1-1/2" UNION

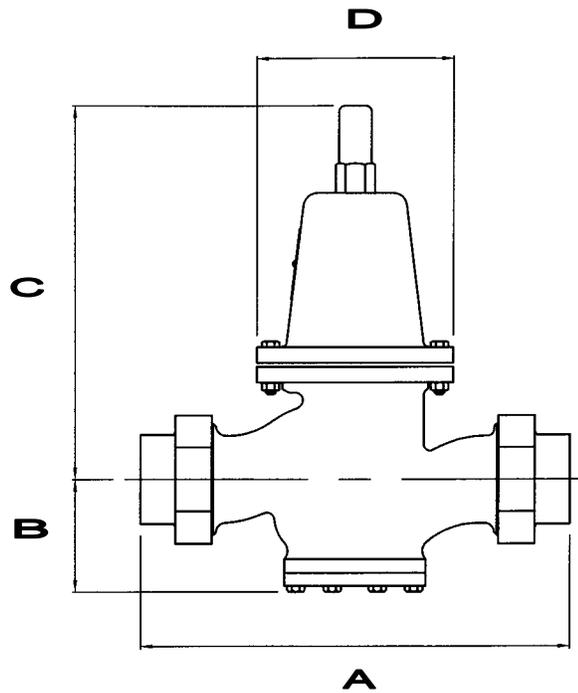

2" UNION

UNION END MIL-F-1183 400#				
VALVE SIZE	'A' DIM	'B' DIM	'C' DIM	'D' DIA
1/4"	8-13/16	2-5/16	9-1/4	5
3/8"	9	2-5/16	9-1/4	5
1/2"	9-3/16	2-5/16	9-1/4	5
3/4"	9-5/8	2-5/16	9-1/4	5
1"	9-7/8	3-1/8	11-5/8	6-1/4
1-1/4"	10-7/8	3-1/8	11-5/8	6-1/4
1-1/2"	11-15/16	3-1/4	11-5/8	6-1/4
2"	13-13/16	3-1/2	12	6-1/4

SPACE ENVELOPE DIMENSIONS

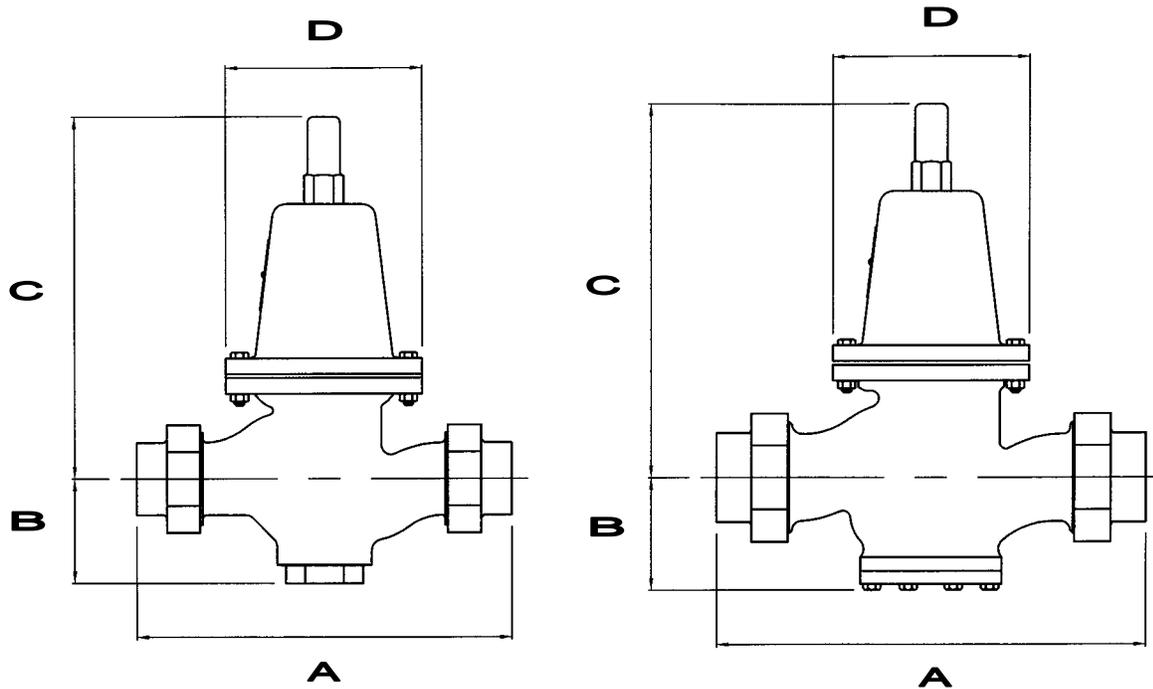

1/2" TO 1-1/2" UNION

2" UNION

UNION END NAVSEA 803-1385946 600#				
VALVE SIZE	'A' DIM	'B' DIM	'C' DIM	'D' DIA
1/4"	9-11/32	2-5/16	9-1/4	5
3/8"		2-5/16	9-1/4	5
1/2"	9-13/32	2-5/16	9-1/4	5
3/4"		2-5/16	9-1/4	5
1"	10	3-1/8	11-5/8	6-1/4
1-1/4"		3-1/8	11-5/8	6-1/4
1-1/2"	12-3/32	3-1/4	11-5/8	6-1/4
2"		3-1/2	12	6-1/4

